

CREATING
POWER
SOLUTIONS



Data Sheet
B-Series
Industrial Diesel Engines

Hatz Drive Solutions





1B30, 1B40, 1B50 Silent

The already low noise level can be further significantly reduced with an optional Silent Noise Package – by 2 to 4 decibels [A], depending on engine type, power output, and operating speed. This reduction is achieved through targeted optimizations of the intake and exhaust components.

First Full Electronic and Full Variable Speed Control < 19 kW

The 1B30, 1B30VE, and 1B50E models belong to the E1 engine family and can be operated via the standardized J1939 CAN protocol through the integrated ECU. Engine parameters can also be monitored using compatible CAN displays or machine control systems.

Hatz B-Series: Flexible Solution for All Areas

The Hatz B-series scores high marks in mobile and stationary operations with compact installation dimensions and for all applications with a power requirement up to 8 kilowatts due to its low weight. With its robustness and longevity, the series sets standards in the market. Regardless of whether on vibration plates or in the harsh environment of the Antarctic, the Hatz B-series has been tried and tested a hundred thousand times in harsh surroundings.

From a mechanical masterpiece to the smart engine

The Single Cam System patented by Hatz essentially determines the very short overall length of the mechanically controlled engines. The injection pump and the valves are operated by a single cam and rocker arms.

The Hatz E1 technology, on the other hand, controls the injection electronically. It enters into an effective relationship with the core engine of the B-series, which has proven its excellence hundreds of thousands of times. And thus creates completely new possibilities.

Raising digital potentials

The engines can be linked to the Hatz Digital Solutions. These allow key information on machine operation to be integrated into fleet management, thereby enabling machine operators to make better decisions. Also possible: optimization of the machine disposition and maintenance, localization and geofencing, and maximization of machine productivity.

Environmental aspects

All B-series engines have been designed for sustainability and environmental compatibility and undergo continuous development. All engines are produced and sold at the highest possible emission level, even if this is not prescribed in the respective target market. The E1 models fulfill all EPA Tier 4 final as well as EU Stage V requirements, even with variable speed across a wide speed range.

One power train – many variants

Thanks to the intelligent design of the engines, it is possible to offer various displacements based on the same power train. For the customer, this provides many options for making the best possible use of the existing space on a machine. Additionally this saves both time and money for the development and construction of entire machinery series.

Optional silent noise package

Depending on the engine type the current low noise level can be significantly reduced further, by up to 4 decibels [A], by a silent noise package. This is possible thanks to optimizations in the area of intake and exhaust components.

Awards

In 2019, the engines of the E1 family won the achievement of the year for the development of the groundbreaking engine technology in the publication previously known as Diesel Progress, currently known as Power Progress. In 2020, the fIPMG products which are based on the 1B30E, 1B30VE, and 1B50E won the Power Progress award for New Power Technology of the year.

1B50E DPF with diesel particulate filter

Although not required by law, Hatz offers the 1B50E engine with an optional passive diesel particulate filter for EU Stage V for defined applications. This makes us the only engine manufacturer to fulfill the strict requirements of the German BG Bau and massively reduces exposure to diesel soot.

Sales area Exhaust certificate	[rpm]	IFN Rating F/IFN/ICFN Rating						
		1B20	1B30E	1B30	1B30VE	1B40	1B50E	1B50
US EPA T4f/CARB constant		–	3000, 3100	–	3100	–	1800, 3000, 3600 ¹	–
US EPA T4f variable		–	3000, 3100, 3600	–	3100	–	3000, 3600	–
Europe EU V constant		3000, 3600	3000, 3100	2950–3000, 3600	3100	3000, 3600	1800, 3000, 3600	1500, 3000
Europe EU V variable		2700–3350	3000, 3100, 3600	2000–3600	3100	2250–3600	3000, 3600	2500–3600
Less regulated		1500–3600	3000, 3600	1500–3600	3100	1500–3600	3000, 3600	1500–3600

¹EPA only

Technical Data, Performance Table


Technical data		1B20	1B30E ²	1B30	1B30VE ²	1B40	1B50E ²	1B50	
Type	Air cooled 4-stroke diesel engine								
Cylinder	1								
Direct injection	mechanical	electronical	mechanical	electronical	mechanical	electronical	mechanical		
Position of crank shaft	horizontal	horizontal		vertical	horizontal	horizontal			
Bore x stroke [mm / in]	69 x 65 / 2.72 x 2.56	80 x 69 / 3.15 x 2.72	80 x 69 / 3.15 x 2.72	80 x 69 / 3.15 x 2.72	88 x 76 / 3.46 x 2.99	93 x 76 / 3.66 x 2.99			
Displacement [l / cu in]	0.243 / 14.83	0.347 / 21.18	0.347 / 21.18	0.347 / 21.18	0.462 / 28.19	0.517 / 31.55			
Mean piston speed @ 3000 rpm [m/s / ft/min]	6.5 / 1279.53	6.9 / 1358.27	6.9 / 1358.27	6.9 / 1358.27	7.6 / 1496.06	7.6 / 1496.06			
Compression ratio	22:1	21.5:1	21.5:1	21.5:1	20.5:1	20.5:1			
Lubrication oil consumption, related to full load	max. 1% of fuel consumption								
Lubrication oil capacity	max. [l / US qts]	0.9 / 0.951	1.1 / 1.162	1.1 / 1.162	1.2 / 1.27	1.5 / 1.528	1.5 / 1.528	1.5 / 1.528	
	min. [l / US qts]	0.4 / 0.423	0.6 / 0.634	0.6 / 0.634	0.7 / 0.74	0.7 / 0.739	0.7 / 0.739	0.7 / 0.739	
Speed control	Lowest idle speed [rpm]	approx. 1000			approx. 800				
	Static speed droop @ 3000 rpm	approx. 5 %	configurable	approx. 5 %	configurable	approx. 5 %	configurable	approx. 5 %	
	Control method	mechanical	CAN J1939, multi stage switch, analog	mechanical	CAN J1939, multi stage switch, analog	mechanical	CAN J1939, multi stage switch, analog	mechanical	
Installation Data	Combustion air required @ 3000 rpm approx. [kg/h / cfm] ³	25.2 / 12.3	37.8 / 18.5		49.8 / 24.3		56.4 / 27.6		
	Cooling air required @ 3000 rpm approx. [kg/h / cfm] ³	306 / 150	432 / 210		528 / 258		552 / 270		
	Starter [V]	12 [1.0 kW / 1.3 hp] 24 [1.6 kW / 2.1 hp]							
	Alternator charging current @ 3000 / 1500 rpm [A]	14 / 7 [14 V] 7 / 4 [28 V]							
Battery capacity min. / max. [Ah]	36 / 55 [12 V] 24 / 44 [24 V]								
Dimensions	Engine with recoil start [kg / lb]	28.0 / 61.7	–	35.0 / 77.2	–	48.0 / 105.8	–	51.2 / 112.9	
	Engine with electric start [kg / lb]	32.8 / 72.3	40.8 / 90.0	39.8 / 87.7	42.8 / 94.4	53.3 / 117.5	57.5 / 126.8	56.5 / 124.6	
L x W x H [mm / in]	292 x 367 x 401 / 11.5 x 14.4 x 15.8	322 x 411 x 431 / 12.7 x 16.2 x 17.0	322 x 404 x 431 / 12.7 x 15.9 x 17.0	398 x 432 x 385 / 15.7 x 17.0 x 15.2	334 x 412 x 480 / 13.1 x 16.2 x 18.9	334 x 438 x 480 / 13.1 x 17.2 x 18.9	334 x 412 x 480 / 13.1 x 16.2 x 18.9		

Engine output max. [kW / hp]	[rpm]	1B20	1B30E ^{2,5}	1B30	1B30VE ^{2,5}	1B40	1B50E ^{2,5}	1B50
Blocked ISO brake horsepower (IFN) for intermittent loading according to ISO 3046-1. For variable speed.	3600	–	4.5 / 6.0	5.0 / 6.7	–	7.3 / 9.8	7.9 / 10.6 8.1 / 10.9 ⁴	7.9 / 10.6
	3000	3.1 / 4.2	4.1 / 5.6	4.6 / 6.2	4.1 / 5.6	6.8 / 9.1	7.6 / 10.2	7.6 / 10.2
	2800	2.9 / 3.9	4.0 / 5.3	4.5 / 6.0	4.0 / 5.3	6.6 / 8.9	7.3 / 9.8	7.3 / 9.8
	2600	–	3.8 / 5.1	4.2 / 5.6	3.8 / 5.1	6.3 / 8.4	6.9 / 9.3	6.9 / 9.3
	2300	–	3.5 / 4.7	3.9 / 5.2	3.5 / 4.7	5.7 / 7.6	6.2 / 8.3	–
	2000	–	3.1 / 4.1	3.4 / 4.6	3.1 / 4.1	–	5.3 / 7.1	–
Blocked ISO brake horsepower (IFN) for intermittent loading according to ISO 3046-1. For constant speed.	3600	3.4 / 4.6	4.5 / 6.0	5.0 / 6.7	–	7.3 / 9.8	7.9 / 10.6 8.1 / 10.9 ⁴	7.9 / 10.6
	3100	–	–	–	4.2 / 5.6	–	–	–
	3000	3.1 / 4.2	4.1 / 5.5	4.6 / 6.2	4.1 / 5.5	6.8 / 9.1	7.6 / 10.2	7.6 / 10.2
	1800	–	–	–	–	–	4.7 / 6.3	–
	1500	–	–	–	–	–	–	–
Blocked ISO brake horsepower (IFN) for intermittent loading according to ISO 3046-1. For variable speed.	3600	3.4 / 4.6	4.5 / 6.0	5.0 / 6.7	–	7.3 / 9.8	7.9 / 10.6 8.1 / 10.9 ⁴	7.9 / 10.6
	3000	3.1 / 4.2	4.1 / 5.6	4.6 / 6.2	4.1 / 5.6	6.8 / 9.1	7.6 / 10.2	7.6 / 10.2
	2800	2.9 / 3.9	4.0 / 5.3	4.5 / 6.0	4.0 / 5.3	6.6 / 8.9	7.3 / 9.8	7.3 / 9.8
	2600	2.8 / 3.8	3.8 / 5.1	4.2 / 5.6	3.8 / 5.1	6.3 / 8.4	6.9 / 9.3	6.9 / 9.3
	2300	2.5 / 3.4	3.5 / 4.7	3.9 / 5.2	3.5 / 4.7	5.7 / 7.6	6.2 / 8.3	6.2 / 8.3
	2000	2.1 / 2.8	3.1 / 4.1	3.4 / 4.6	3.1 / 4.1	4.9 / 6.6	5.3 / 7.1	5.3 / 7.1
Less regulated markets	1800	1.9 / 2.5	2.7 / 3.6	3.0 / 4.0	2.7 / 3.6	4.4 / 5.9	4.7 / 6.3	4.7 / 6.3
	1500	1.5 / 2.0	2.1 / 2.8	2.3 / 3.1	2.1 / 2.8	3.5 / 4.7	3.9 / 5.2	3.9 / 5.2


² Performance data ICFN ³ For other rpm there is a linear reduction in the air requirement. ⁴ EU Stage V only ⁵ Power ratings include generator power

Power Output, Torque and Fuel Consumption


1B20

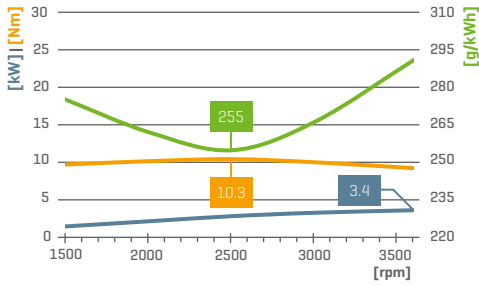


1B30E^{2,5} | 1B30VE^{2,5}

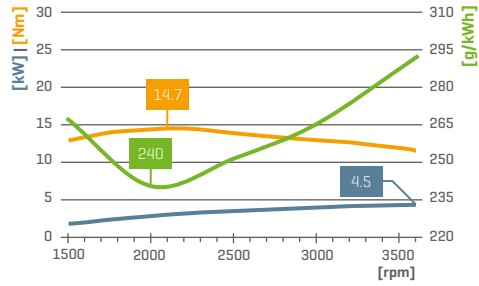


1B30

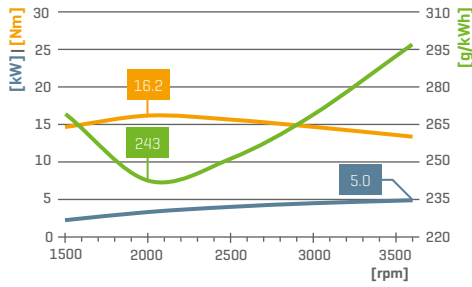


1B40

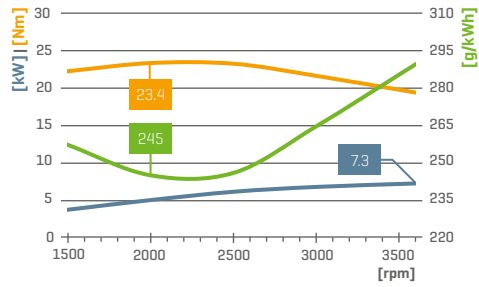

1B50E^{2,5}

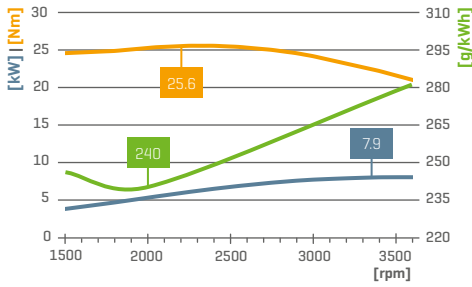

1B50



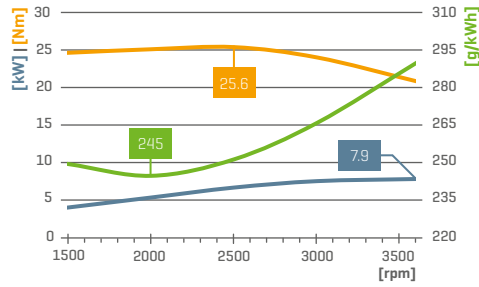


Performance data
Performance data refer to Standard Reference Conditions of ISO 3046-1 (IFN): + 25 °C [77 °F], 100 kPa, relative humidity 30%.
During running-in period the output increases by approx. 5 % which is taken into consideration at delivery. Power reduction acc. to ISO 3046-1. Standard values:
Above 100 m ALT approx. 1 % per 100 m.
Above 25 °C [77 °F] approx. 4 % per 10 °C [50 °F].
The power taken from charging alternator also has to be added to the demand of power.




Shaft Forms

Selection of available shaft forms


Cylindrical with key way

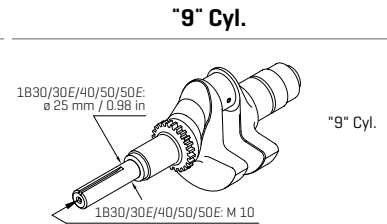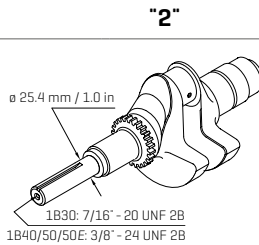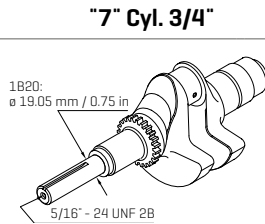

Conical

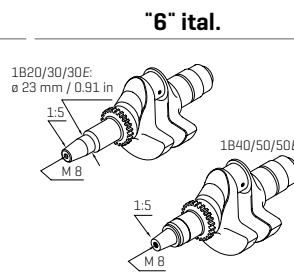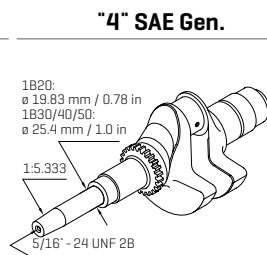


Universal

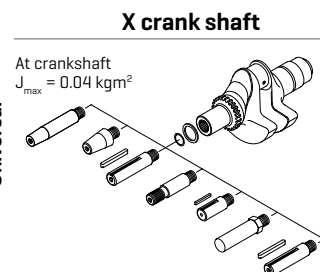


⁶ According to LEMA LES 1203-1991


Maintenance and Operating Points

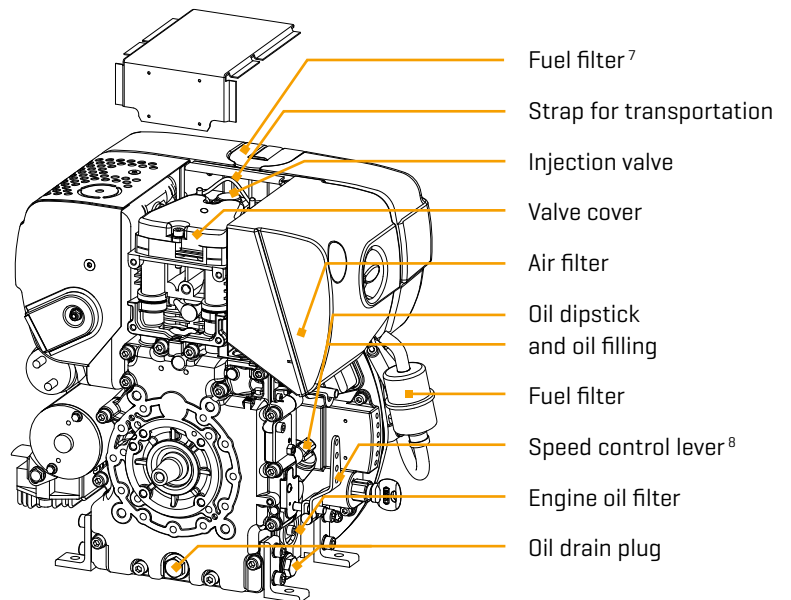

Power-Take-off Points

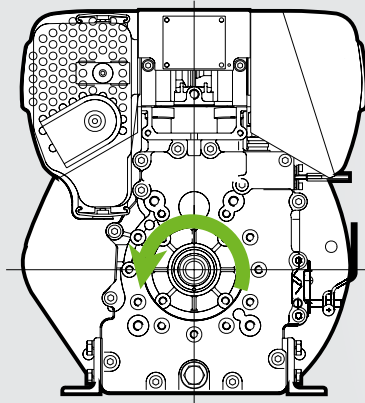


Power-take-off shaft, governor side, with max. engine speed, sense of rotation anti-clockwise.

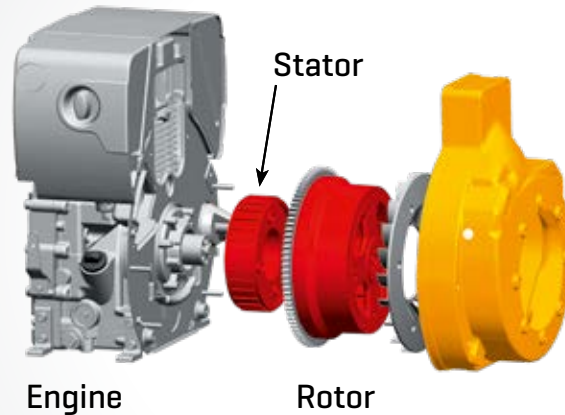

A permanent magnet alternator from 2 to 7 kW can be mounted on the flywheel side.

Permissible Load on Power-Take-off Points

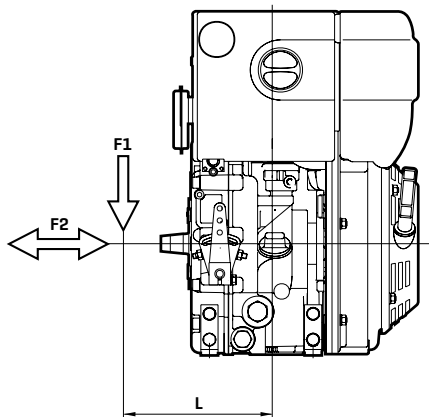

1B20 / 1B30E / 1B30

max. permissible radial force

$$F1 = \frac{60\,000}{L [\text{mm}] - 70} [\text{N}]$$

max. permissible axial force

$$F2 = 800 [\text{N}]$$


1B40 / 1B50E / 1B50

max. permissible radial force

$$F1 = \frac{62\,600}{L [\text{mm}] - 84} [\text{N}]$$

max. permissible axial force

$$F2 = 1200 [\text{N}]$$

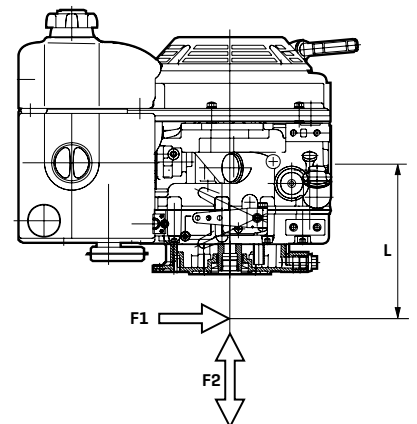


⁷ Only for electronically controlled engines ⁸ Only for mechanically controlled engine types


Dimensions [mm / in] and Inclinations⁹ [°]

Dimensions for DPF on request.
 Spread at box dimensions ± 3 millimeters due to tolerance.
 Drawings with detail and connection dimensions as PDF and DXF
 can be found at hatz.com/us


1B20

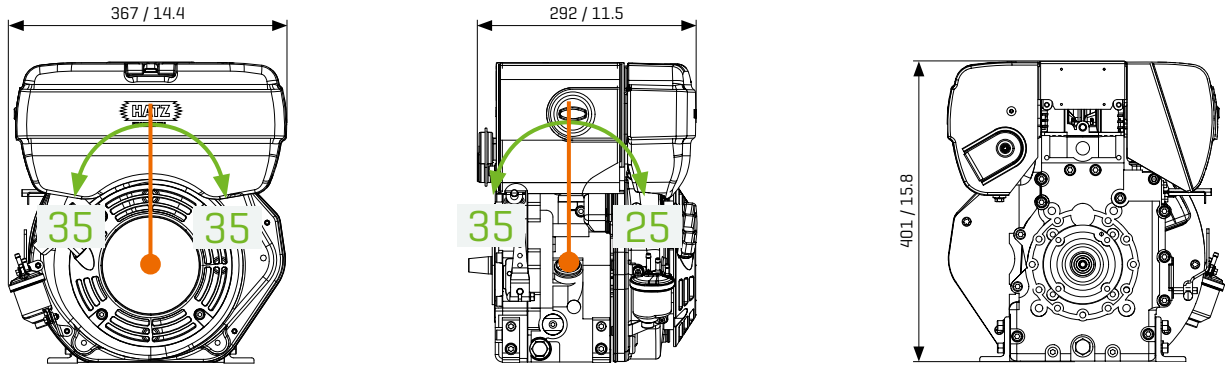


1B30E | 1B30

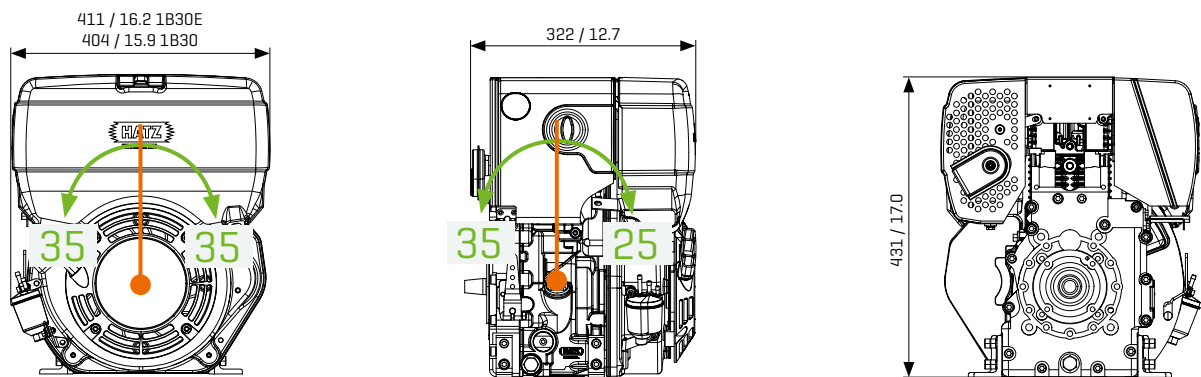

1B30VE

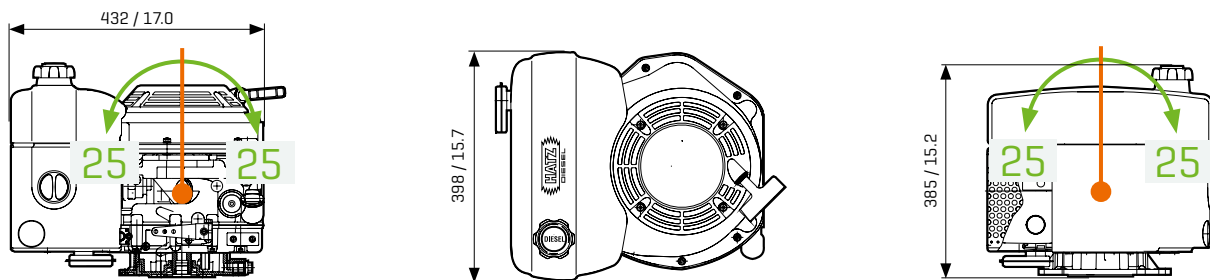

1B40 | 1B50E | 1B50

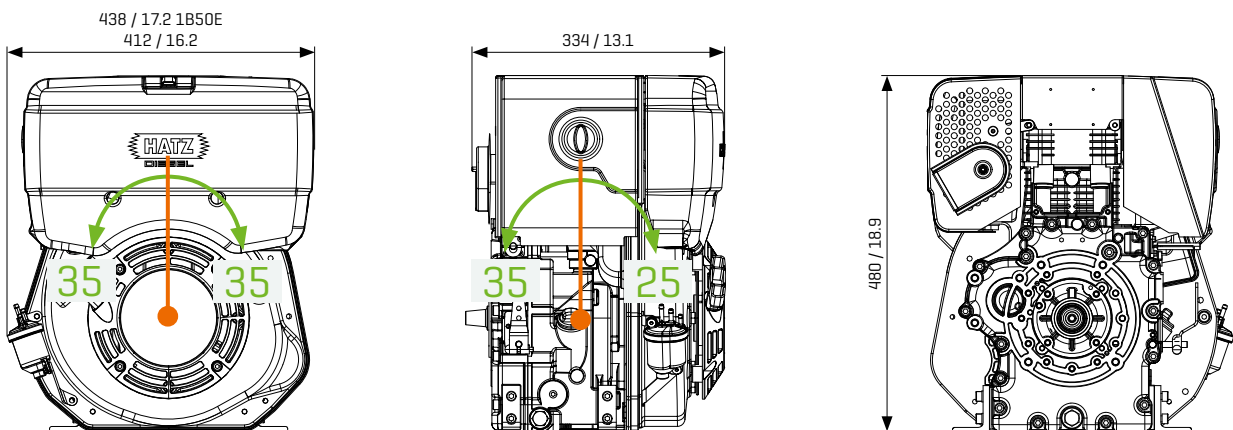

⁹ Maximum permanent inclined positions

Hatz Americas, Inc.
W229 N1645 Westwood Drive
Waukesha, WI 53186-1153
USA
Phone +1 262 544 0254
sales@hatznorthamerica.com
hatz.com/us



**CREATING
POWER
SOLUTIONS**

40531500 ENUS 04.26 Printed in USA
Modifications, which serve technical
improvement, are reserved.